

# 隧道灯 705


Tunnel Light

## 适用场所

高速公路隧道、城市隧道、城市地下通道、高架桥底等

### Area:

High Way, City Tunnel, Underground Tunnel, Viaduct, etc

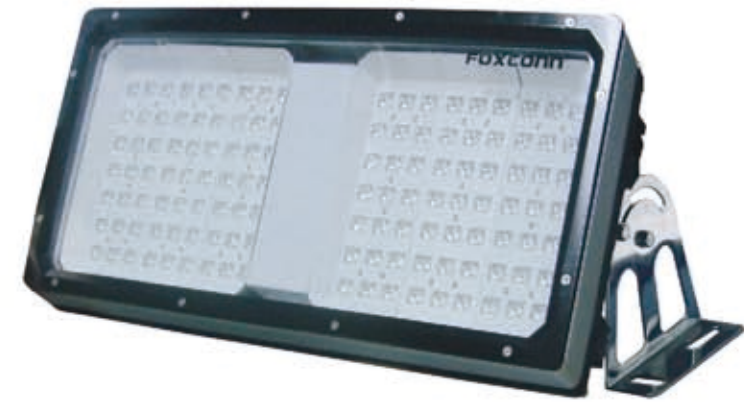

# 705 CE

主要技术参数		165W	150W
LED发光效率	LED Luminous Efficiency	>100 lm/W	
灯具光通量	Lamp Flux	12500 lm	11400 lm
相关色温(CCT)	Color Temperature	3000-6000K	
额定电压	Rated Voltage	~100V - 240V	
电源频率	Frequency Range	50/60 Hz	
额定功率	Rated Power	165 W	150 W
电源效率	Power Efficiency	> 88%	
功率因数(PF)	Power Factor	>0.9	
净重	Net Weight	15.0 Kg ± 5%	
显色指数(CRI)	Color Rendering Index	Ra>70	
工作环境	Working Environment	环境温度 Working Temperature: -40 ℃ - 50 ℃ 相对湿度 Working Humidity: 10%-90%	
光源寿命	LED Life Time	> 50000 Hrs	
材料	Material	铝合金和钢化玻璃 Aluminum Alloy & Tempered Glass	
外形尺寸	Figuration Size	630 x 280 x 237 mm	
防护等级	IP Rating	IP 65	
安装方式	Installation	固定式支架 Fixed Bracket 可调式支架 Adjustable Bracket	

